



BACKFILL  
 NATIVE MATERIAL  
 COMPACTION BASED ON  
 STANDARD PROCTOR  
 90% COMPACTION IN PARKWAYS  
 95% COMPACTION UNDER PAVEMENT  
 TEST DENSITY EVERY 300'  
 ON EVERY SECOND LIFT  
 SECTION 504.2.3.3  
 NCTCOG SPECS.  
 NATIVE MATERIAL SHALL BE FREE  
 OF STONES, RUBBISH, ROOTS AND  
 OTHER OBJECTIONAL BEBRIS

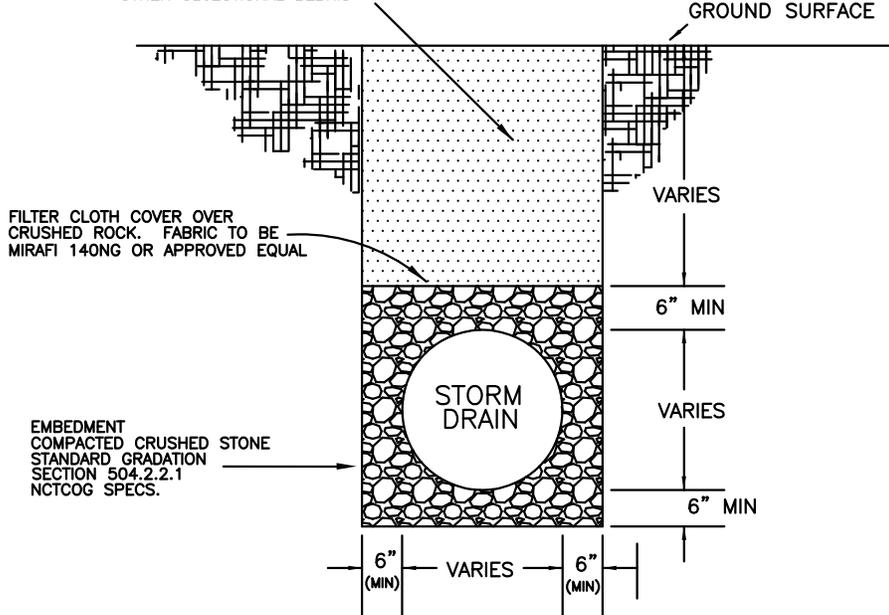

STORM DRAIN EMBEDMENT DETAIL  
 RCP UNDER PAVEMENT AND HDPE PIPE

NOTE:  
 HDPE PIPE IS NOT ALLOWED  
 UNDER PUBLIC PAVEMENT.

BACKFILL  
 NATIVE MATERIAL  
 COMPACTION BASED ON  
 STANDARD PROCTOR  
 90% COMPACTION IN PARKWAYS  
 95% COMPACTION UNDER PAVEMENT  
 TEST DENSITY EVERY 300'  
 ON EVERY SECOND LIFT  
 SECTION 504.2.3.3  
 NCTCOG SPECS.  
 NATIVE MATERIAL SHALL BE FREE  
 OF STONES, RUBBISH, ROOTS AND  
 OTHER OBJECTIONAL BEBRIS

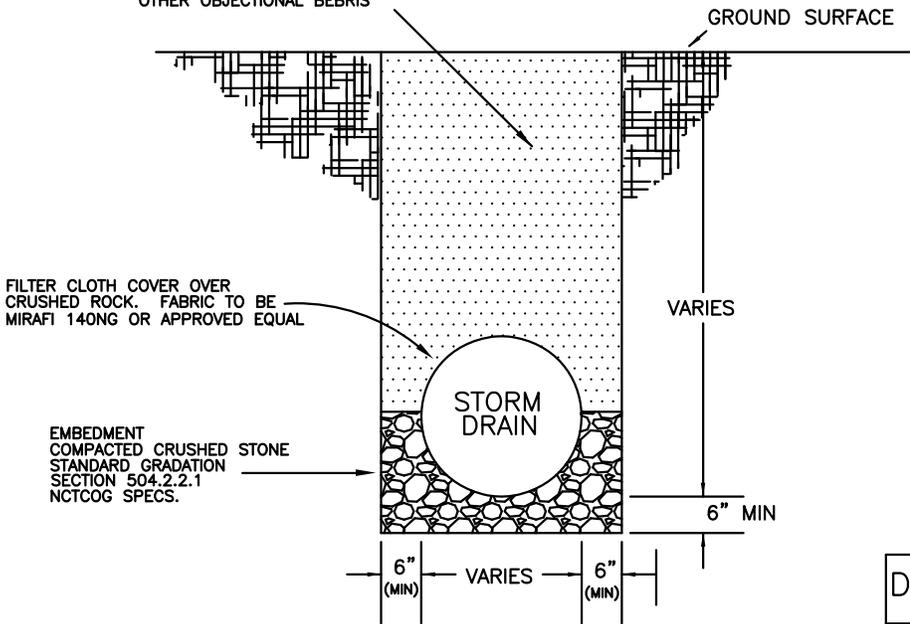

STORM DRAIN EMBEDMENT DETAIL  
 RCP IN PARKWAY OR UNPAVED EASEMENT

D-06	STORM DRAIN EMBEDMENT	
CITY OF BURLESON		
ORIGINAL	10/6/06	SWC
REVISION		
REVISION		
REVISION		