


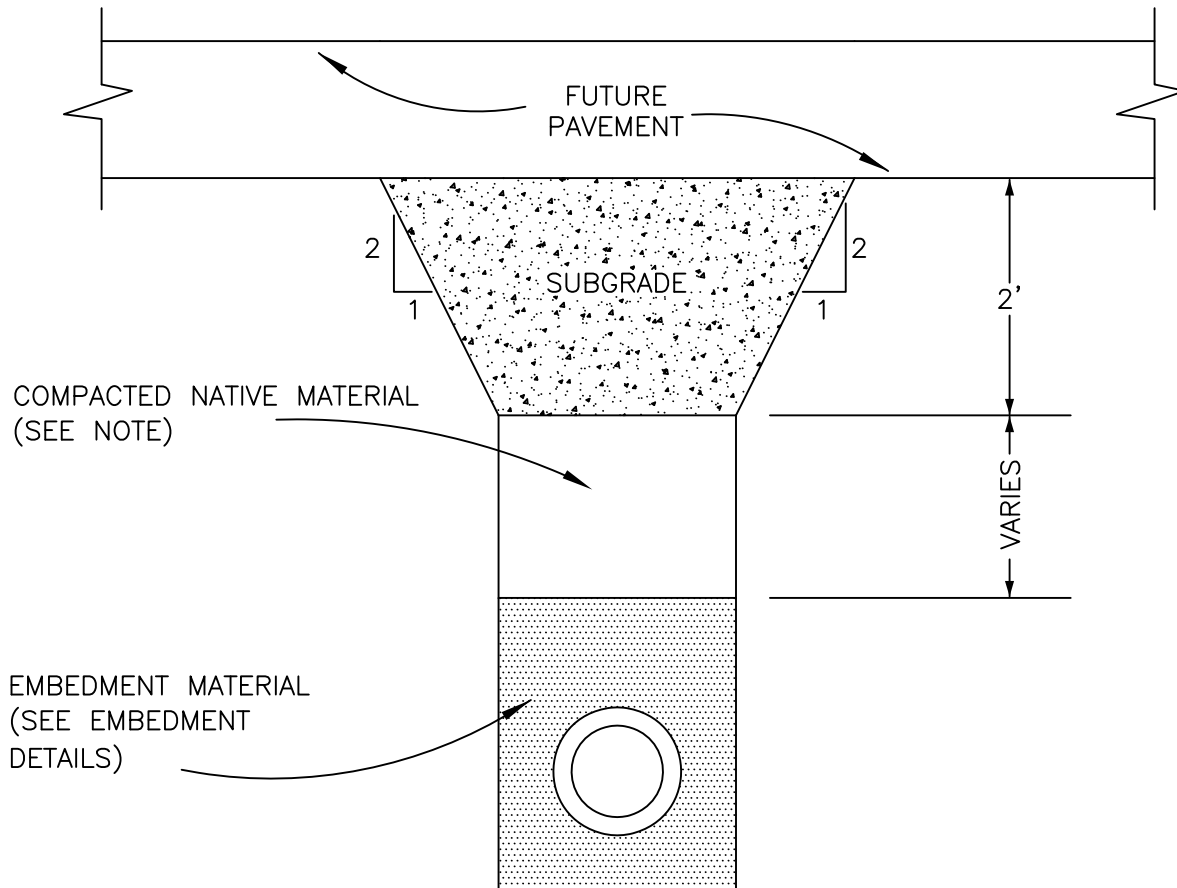

NOTE:

FOR LINES BEING LAID PRIOR TO NEW STREET CONSTRUCTION, WHICH WILL LIE BENEATH PAVEMENT OR CURB AND GUTTER, BACKFILL ABOVE PIPE EMBEDMENT SHALL CONSIST OF NATIVE MATERIAL, COMPACTED IN MAX. 6" TO 9" LIFTS (COMPACTED THICKNESS) TO 95% STANDARD PROCTOR DENSITY AT OPTIMUM MOISTURE CONTENT $\pm 2\%$.

D-12	STREET BACKFILL PRIOR TO STREET CONSTRUCTION	
CITY OF BURLESON		
ORIGINAL	10/6/06	SWC
REVISION		
REVISION		
REVISION		