



NOTES:

1. IN LOCATIONS WHERE WALL HEIGHT DOES NOT EXCEED 1', THE TOE WALL AND WEEP HOLES CAN BE OMITTED.
2. IN LOCATIONS WHERE WALL IS 36" TO 48" THE TOE WALL SHALL BE 1" DEPTH.
3. STEEL REINFORCING IN WALL SHALL BE #3 BARS @ 12" CENTERS HORIZONTALLY AND #4 BARS @ 8" CENTERS VERTICALLY.
4. REDWOOD JOINTS IN WALL SHALL MATCH REDWOOD JOINTS IN THE SIDEWALK. THE WALL SHALL BE DOUBLE CHAMFERED AT THE REDWOOD LOCATIONS.
5. ENDS OF WALL SHALL ALSO BE CHAMFERED.
6. CONCRETE TO HAVE COMPRESSIVE STRENGTH OF 3000 psi at 28 DAYS.
7. PRE-MOLDED MATERIAL WITH REMOVABLE CAP STRIP, SEAL WITH NON-SAG GRAY SILICONE SEALANT, TXDOT CLASS 4 PREQUALIFIED JOINT SEALER.

6' SIDEWALK WITH WALL

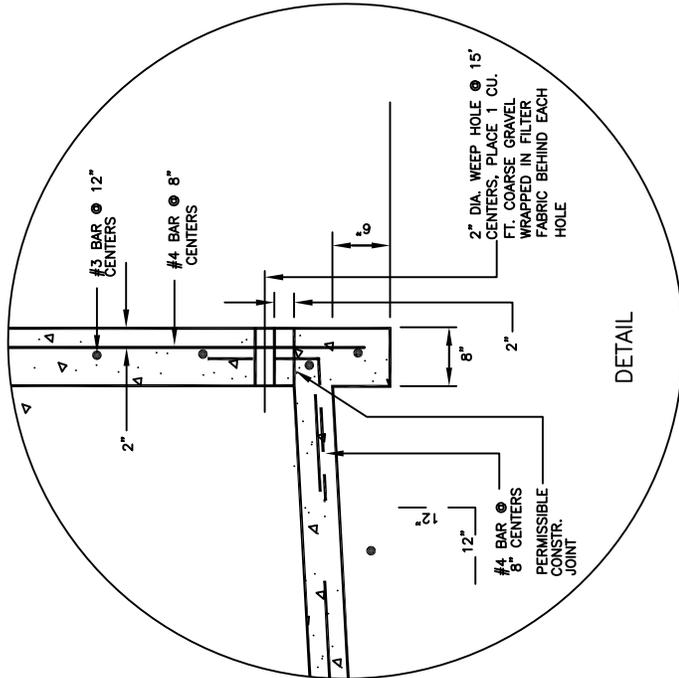

DETAIL

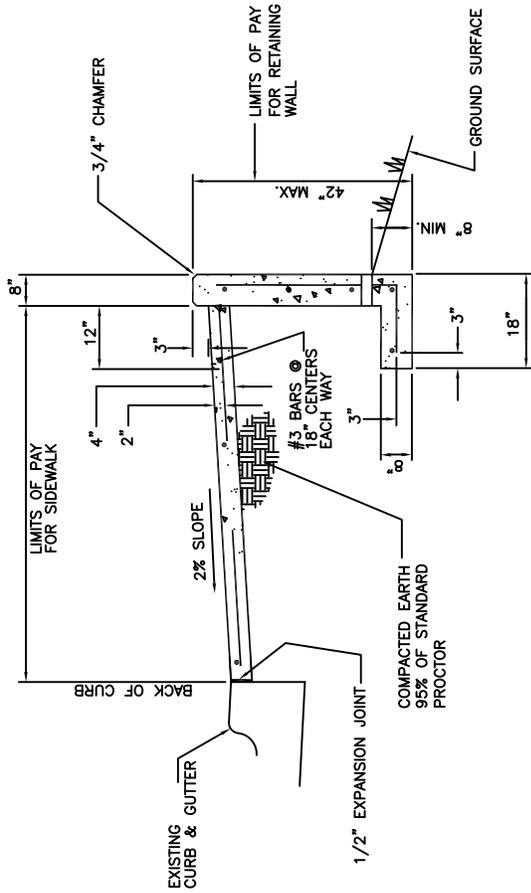

NOTES:

1. STEEL REINFORCING IN WALL SHALL BE #3 BARS @ 12" CENTERS HORIZONTALLY AND #4 BARS @ 8" CENTERS VERTICALLY.
2. REDWOOD JOINTS IN WALL SHALL MATCH REDWOOD JOINTS IN THE SIDEWALK. THE WALL SHALL BE DOUBLE CHAMFERED AT THE REDWOOD LOCATIONS.
3. ENDS OF WALL SHALL ALSO BE CHAMFERED.
4. AT 28 DAYS.

SIDEWALK WITH LOW WALL

P-21	SIDEWALK WITH WALL
CITY OF BURLESON	
ORIGINAL	10/6/06
REVISION	
REVISION	
REVISION	

SWC