




HORIZONTAL REINFORCING BARS  
TO BE SPACED EQUIDISTANT  
AROUND PERIMETER OF PIPE  
AND TIED AT 4' INTERVALS

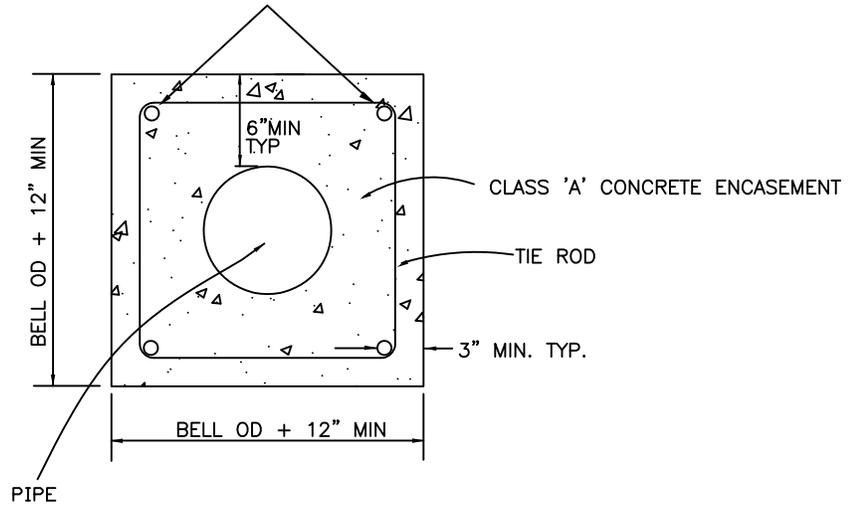

- 6" - 8" PIPE: 4 - #4 HORIZONTAL REINFORCING BARS WITH TIE RODS
- 10" - 12" PIPE: 4 - #5 HORIZONTAL REINFORCING BARS WITH TIE RODS
- 15" - 18" PIPE: 8 - #5 HORIZONTAL REINFORCING BARS WITH TIE RODS
- 20" - 30" PIPE: 8 - #6 HORIZONTAL REINFORCING BARS WITH TIE RODS

S-10	CONCRETE ENCASEMENT	
CITY OF BURLESON		
ORIGINAL	10/6/06	SWC
REVISION		
REVISION		
REVISION		