



EPOXY TIE BAR

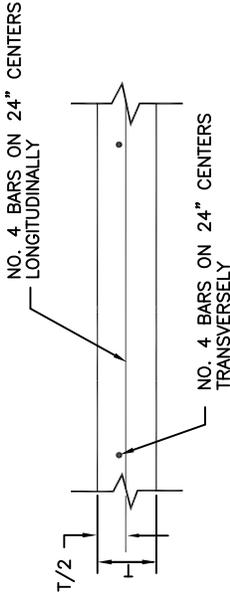


PAVEMENT REINFORCING

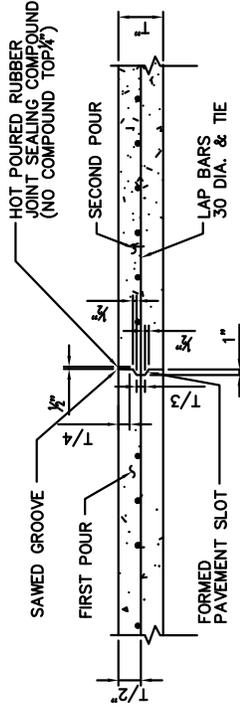

T = PAVEMENT THICKNESS
KEYWAY REQUIRED FOR T = 8" AND GREATER.


CONSTRUCTION JOINT

T	DOWEL SIZE	SPACING
< 7"	# 6	12"
≥ 7"	# 8	12"

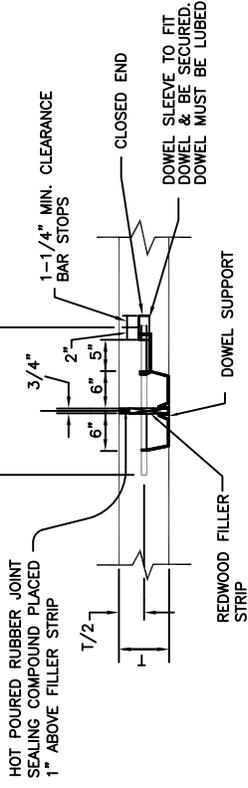

- NOTES: 1. PAVEMENT STEEL IS NOT SHOWN FOR CLARITY AND SHALL STOP 3 INCHES FROM JOINT.
2. EXPANSION JOINTS SHALL BE PLACED AT ALL POINTS OF CURVATURE. POINTS OF TANGENCY AND ALL INTERSECTION CURB RETURN POINTS. MAXIMUM SPACING SHALL BE 600 FEET.

TRANSVERSE EXPANSION JOINT

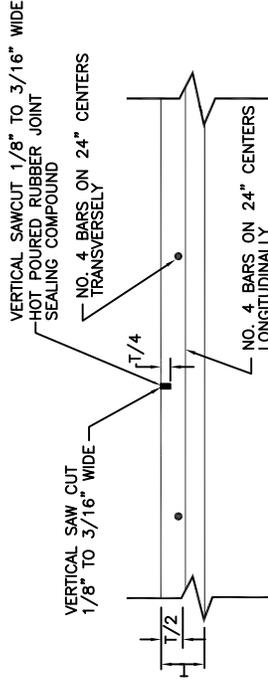

- NOTE: TRANSVERSE JOINTS SHALL BE PLACED AT THE FOLLOWING INTERVALS:
6" THICKNESS = 12'
7" & 8" THICKNESS = 15'

SAWED CONTRACTION JOINT

P-12d	CONCRETE PAVEMENT DETAILS (SHEET 1 OF 2)
CITY OF BURLESON	
ORIGINAL	10/6/06
REVISION	SWC
REVISION	
REVISION	