


BACKFILL
 NATIVE MATERIAL
 COMPACTION BASED ON
 STANDARD PROCTOR
 90% COMPACTION IN PARKWAYS
 95% COMPACTION UNDER PAVEMENT
 TEST DENSITY EVERY 300'
 ON EVERY SECOND LIFT
 SECTION 504.2.3.3
 NCTCOG SPECS.
 NATIVE MATERIAL SHALL BE FREE
 OF STONES, RUBBISH, ROOTS AND
 OTHER OBJECTIONAL BEBRIS

FILTER CLOTH COVER OVER
 CRUSHED ROCK. FABRIC TO BE
 MIRAFI 140NG OR APPROVED EQUAL

EMBEDMENT
 COMPACTED CRUSHED STONE
 STANDARD GRADATION
 SECTION 504.2.2.1
 NCTCOG SPECS.
 (3/4')

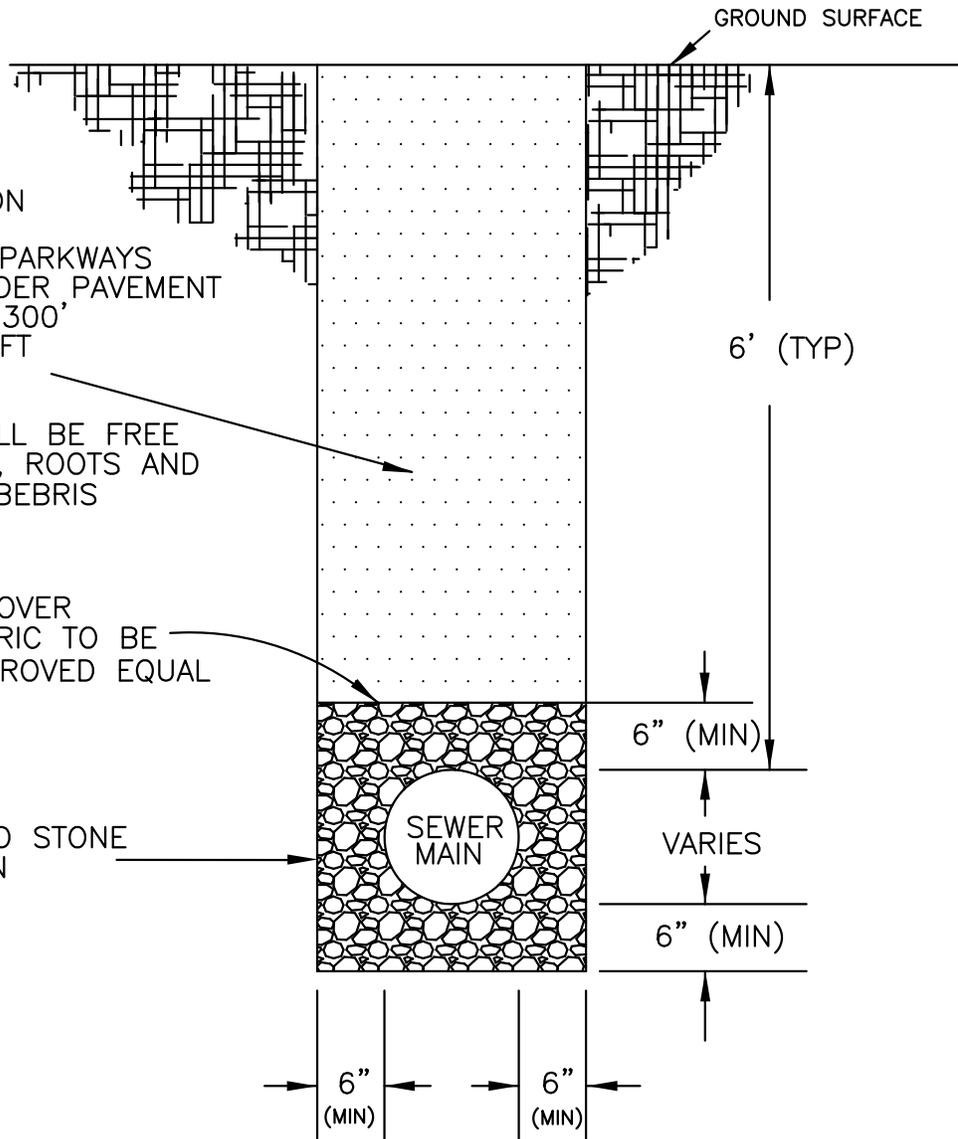

S-05	SANITARY SEWER EMBEDMENT	
CITY OF BURLESON		
ORIGINAL	10/6/06	SWC
REVISION		
REVISION		
REVISION		